

Cilindri molla ad azoto Serie M
Nitrogen gas spring M Series



M 200

ACTIVE SAFETY



*F1i =
Forza finale isotermaica
con 100% Cu
Isothermal end force at 100% Cu

**F1p =
Forza finale politropica
con 100% Cu
Polytrophic end force at 100% Cu

Table with 5 columns: Colore forza (Force color code), P (bar, psi), F0 (daN, lb) at +20°C and +68°F. Rows include OR, PR, GR, BU, RD, YW, BK.

Importante: per la versione BK, indicare la pressione richiesta al momento dell'ordine. Questo garantisce che il cilindro venga consegnato pronto per l'utilizzo.
Important: For the BK version, please indicate the required pressure when placing the order. This ensures your cylinder is delivered ready for use.
P = pressione di carico nominale. P = nominal charging pressure


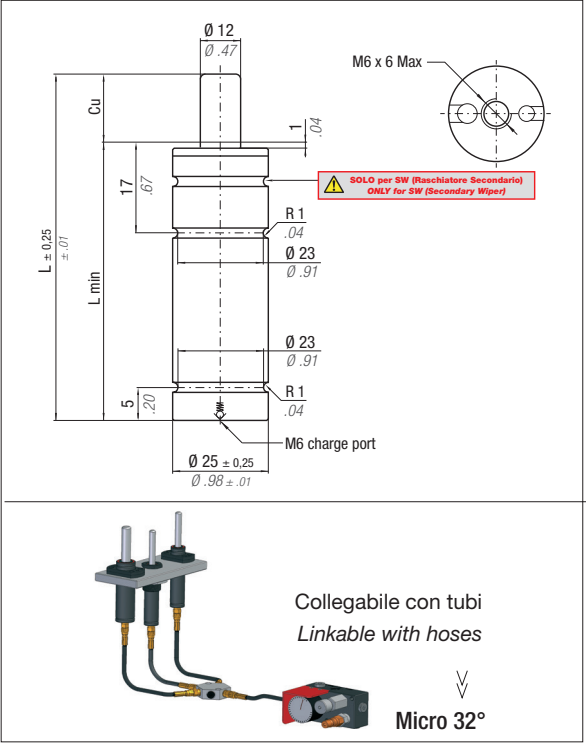


Table with 8 columns: N2, temperature range, pressure change rate, max/min pressure, stroke, speed, max velocity, and maintenance kit.

Large table with 12 columns: Codice Code, Cu, L, L min, F1i, F1p, VO, and weight. Rows list various models from M200-007 to M200-200.

Esempio di ordinazione/Order example = M 200-007-BU (codice/code + colore forza/force color code)

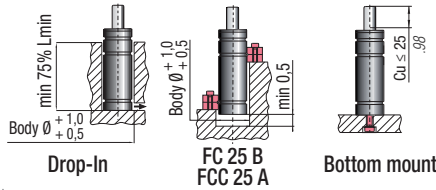

Fissaggi Flange mounts

