

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 500

OSAS + OSM = OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER

ACTIVE SAFETY



*F1i = Forza finale isoteramica con 100% Cu
Isothermal end force at 100% Cu

**F1p = Forza finale politropica con 100% Cu
Polytrophic end force at 100% Cu

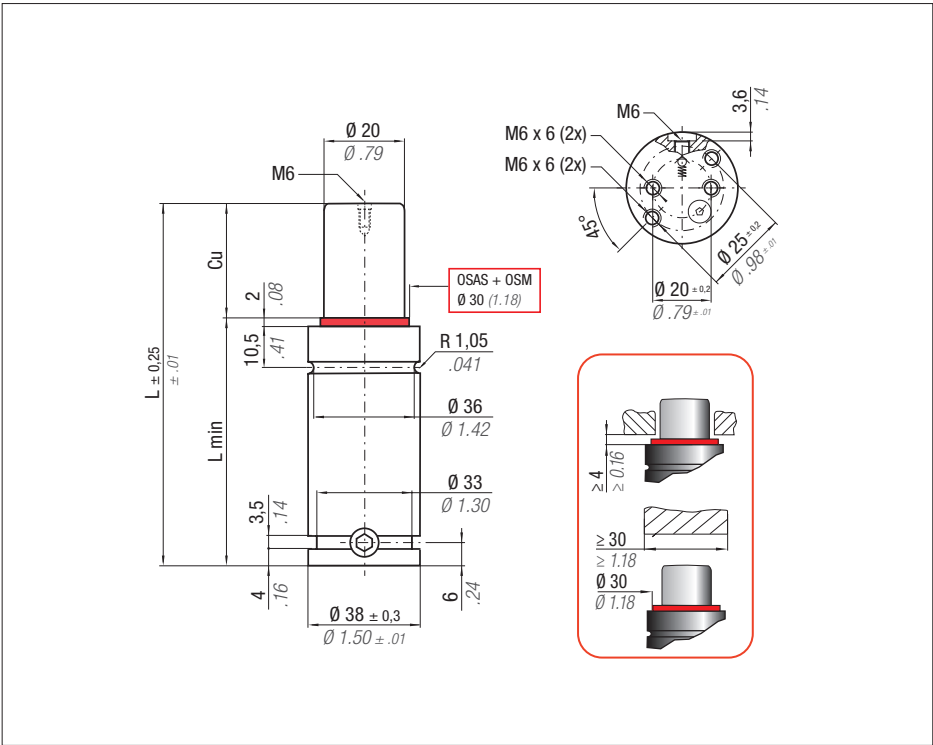


Table with 9 columns: N2, Temperature (0-80 °C / 32-176 °F), Delta P (± 0.33 %/°C), P max (150 bar / 2175 psi), P min (20 bar / 290 psi), S (3.14 cm² / 0.487 in²), SPM (~ 20 - 100 at 20°C), Velocità massima (1.8 m/s / 70.8 in/s), Kit manutenzione (39BMRV00500C).

Table with 11 columns: Codice Code, Cu, L, L min, FO (Forza iniziale / Initial force), *F1i (Forza finale / End force), **F1p (Forza finale / End force), VO, ~Kg, ~lb, PED 2014/68/EU. Rows include various RV 500 models and their specifications.

Esempio di ordinazione/Order example = RV 500-010 (codice/code)

• Monouso / Disposable

