

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 750

OSAS + OSM = OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER



*F1i = Forza finale isoteramica con 100% Cu
Isothermal end force at 100% Cu
**F1p = Forza finale politropica con 100% Cu
Polytrophic end force at 100% Cu

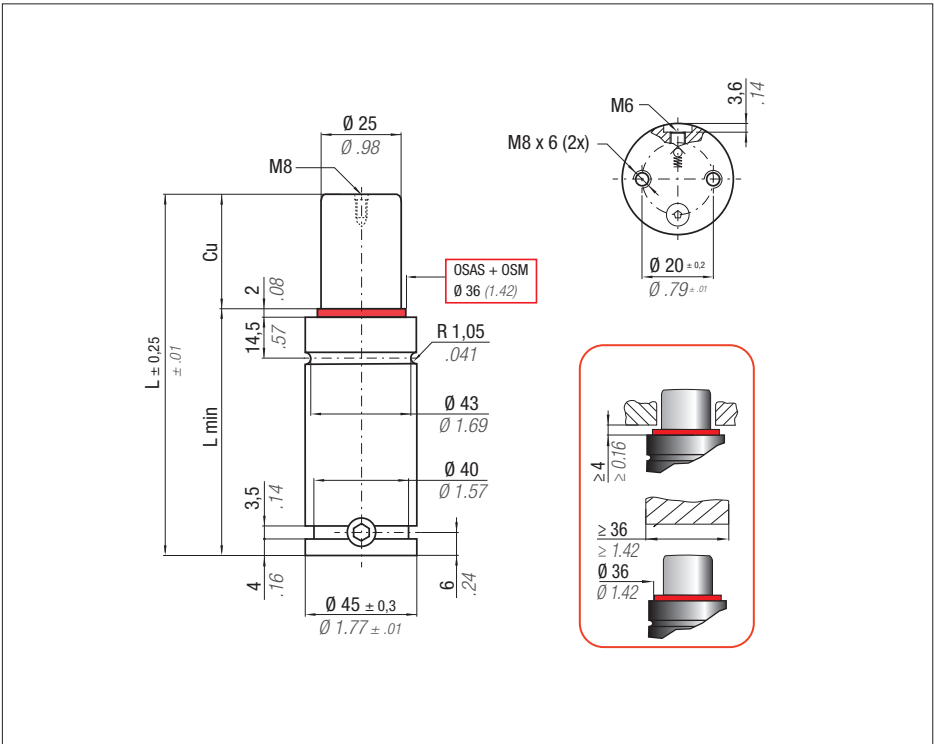


Table with 9 columns: N2, Temperature (0-80 °C / 32-176 °F), Delta P (0.33 %/°C), P max (150 bar), P min (20 bar), S (4.91 cm²), SPM (~20-100), Max Speed (1.8 m/s), and Maintenance kit (39BMRV00750C).

Main product table with columns: Codice Code, Cu, L, L min, FO (Forza iniziale), *F1i, **F1p, VO, and PED. It lists various models like RV 750-010 to RV 750-125.

Esempio di ordinazione/Order example = RV 750-010 (codice/code) • Monouso / Disposable

