

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 1000

OSAS + OSM = OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER



*F1i = Forza finale isoteramica con 100% Cu
Isothermal end force at 100% Cu

**F1p = Forza finale politropica con 100% Cu
Polytrophic end force at 100% Cu

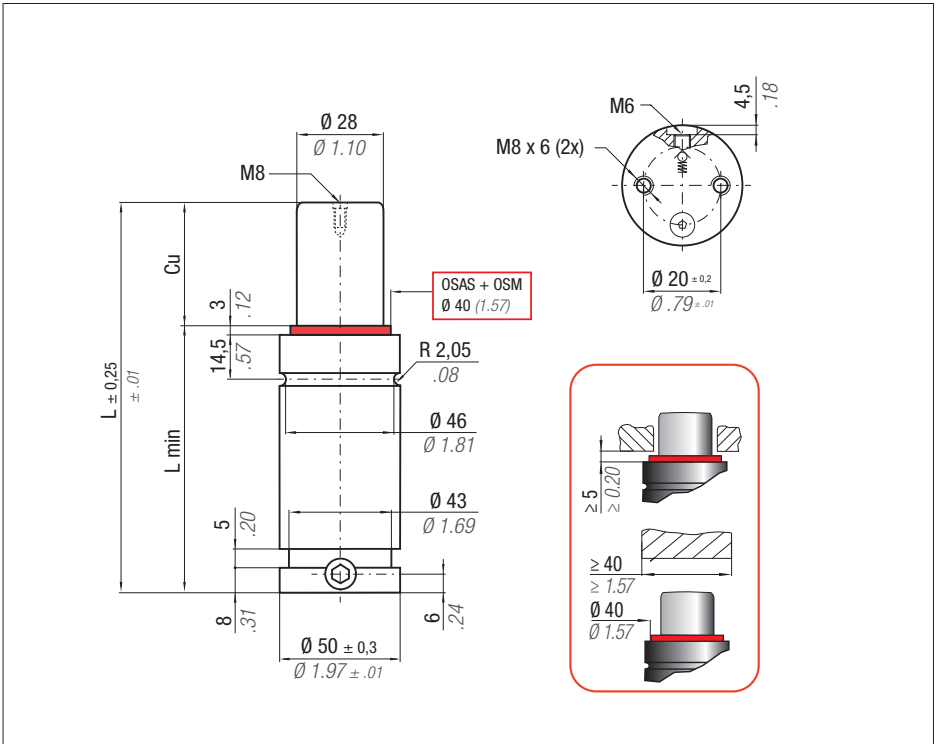


Table with 8 columns: N2, Temperature range (0 - 80 °C / 32 - 176 °F), Delta P (± 0,33 %/°C), P max (150 bar / 2175 psi), P min (20 bar / 290 psi), S (6,15 cm² / 0.953 in²), SPM (~ 20 - 100 (at 20°C)), Velocità massima / Max Speed (1,8 m/s / 70.8 in/s), Kit manutenzione / Maintenance kit (39BMRV01000C).

Table with 11 columns: Codice Code, Cu, L, L min, FO (Forza iniziale / Initial force), *F1i (Forza finale / End force), **F1p (Forza finale / End force), VO, ~Kg ~lb, PED 2014/68/EU. Rows list various RV 1000 models and their specifications.

Esempio di ordinazione/Order example = RV 1000-010 (codice/code) • Monouso / Disposable

