

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 1200

OSAS + OSM = OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER



*F1i = Forza finale isoteramica con 100% Cu
Isothermal end force at 100% Cu
**F1p = Forza finale politropica con 100% Cu
Polytropic end force at 100% Cu

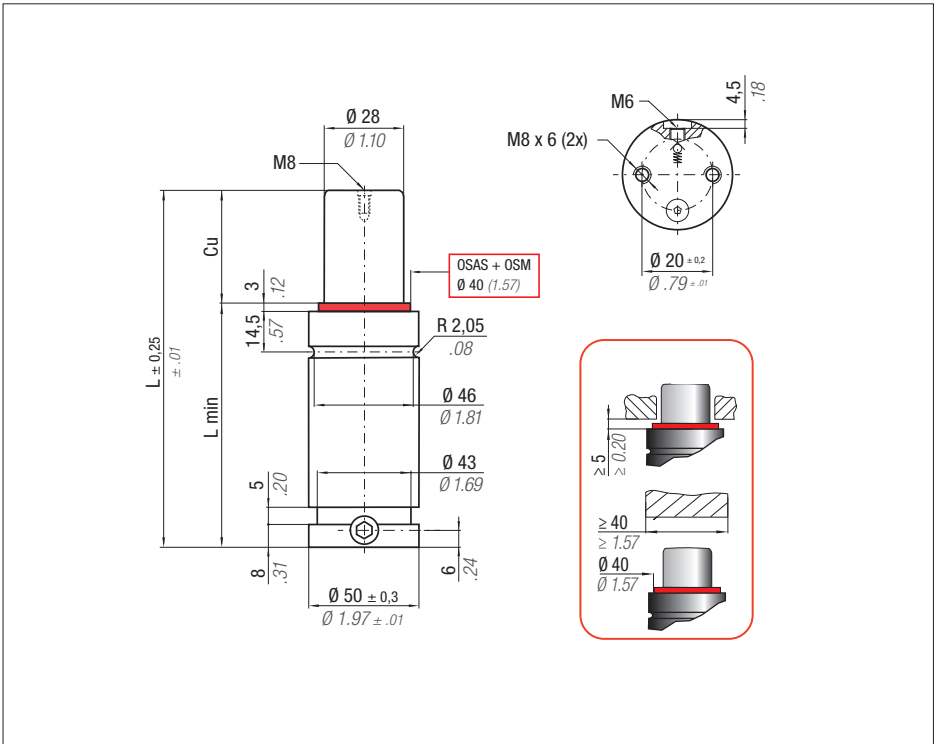


Table with 9 columns: N2, Temperature (0 - 80 °C), Delta P (0.33 %/°C), P max (170 bar), P min (20 bar), S (6.15 cm²), SPM (~20 - 100), Max Speed (1.8 m/s), and Maintenance kit (39BMRV01000C).

Table with 10 columns: Codice Code, Cu, L, L min, FO (Forza iniziale), *F1i (Forza finale), **F1p (Forza finale), VO, ~Kg, ~lb, and PED (2014/68/EU). It lists various RV 1200 models and their specifications.

Esempio di ordinazione/Order example = RV 1200-010 (codice/code) • Monouso / Disposable

