

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 1500

OSAS + OSM = OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER



*F1i = Forza finale isoteramica con 100% Cu
Isothermal end force at 100% Cu
**F1p = Forza finale politropica con 100% Cu
Polytrophic end force at 100% Cu

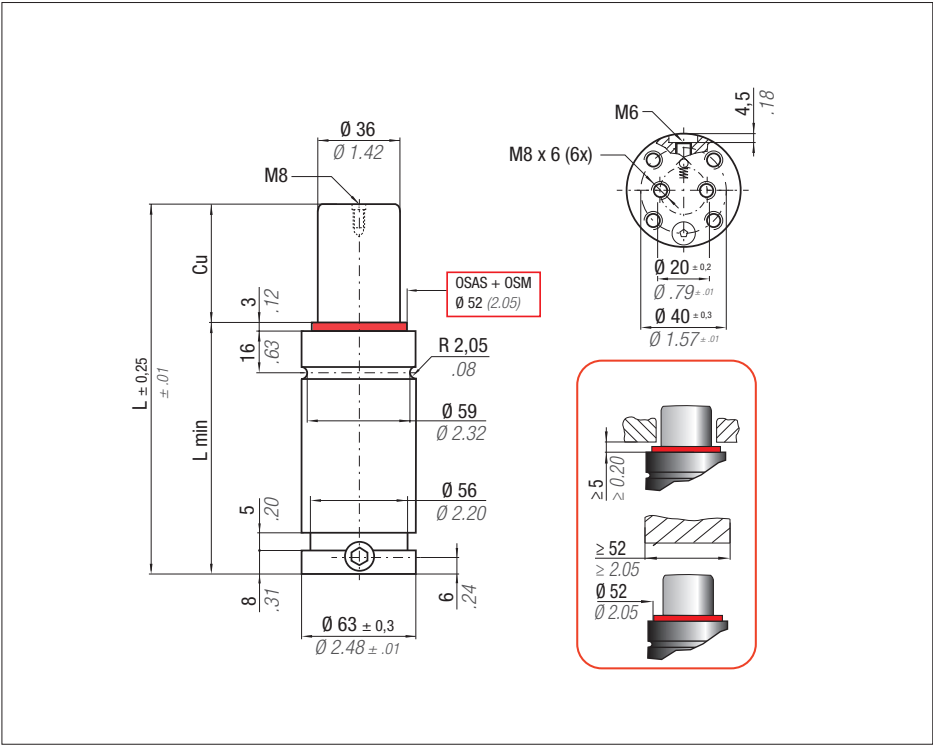


Table with 8 columns: N2, Temperature (0 - 80 °C / 32 - 176 °F), Delta P (± 0,33 %/°C), P max (150 bar / 2175 psi), P min (20 bar / 290 psi), S (10,18 cm² / 1.578 in²), SPM (~ 20 - 100 (at 20°C)), Velocità massima / Max Speed (1,8 m/s / 70.8 in/s), Kit manutenzione / Maintenance kit (39BMRV01500C).

Table with 10 columns: Codice Code, Cu, L, L min, FO (Forza iniziale / Initial force), *F1i (Forza finale / End force), **F1p (Forza finale / End force), VO, ~Kg ~lb, PED 2014/68/EU. Rows list various RV 1500 models and their specifications.

Esempio di ordinazione/Order example = RV 1500-010 (codice/code) • Monouso / Disposable

Fissaggi Flange mounts section showing various mounting options with diagrams and part numbers like FB 50, FS2A 63, FC 63A, FSC 63.