

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 2400

OSAS + OSM = OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER



*F1i = Forza finale isoteramica con 100% Cu
Isothermal end force at 100% Cu
**F1p = Forza finale politropica con 100% Cu
Polytropic end force at 100% Cu

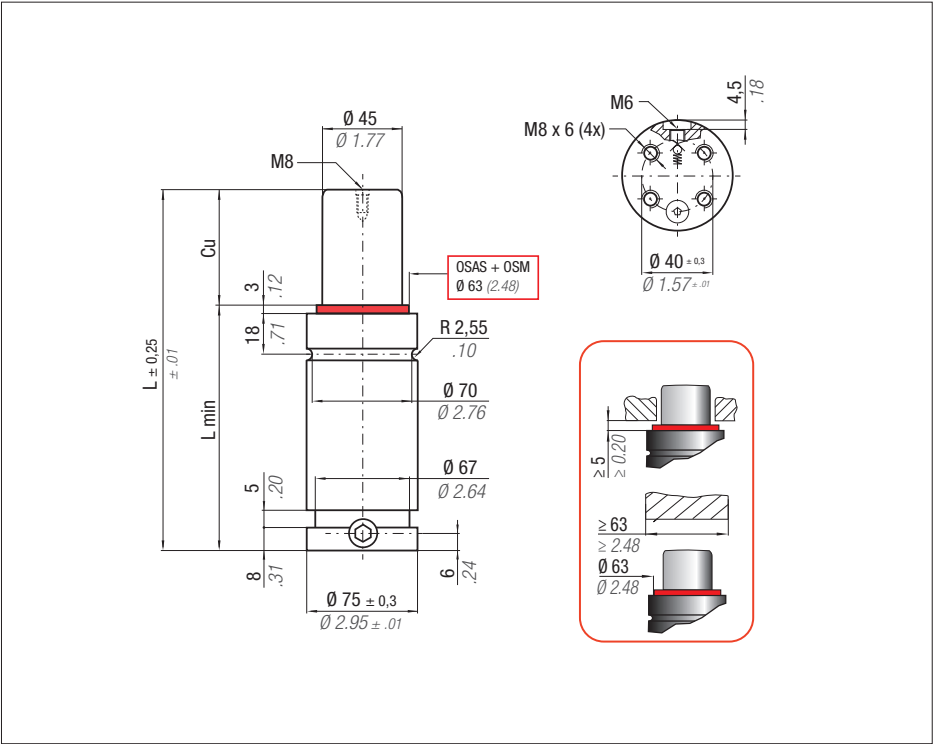


Table with 9 columns: N2 symbol, Temperature range (0 - 80 °C / 32 - 176 °F), Delta P (± 0,33 %/°C), P max (150 bar / 2175 psi), P min (20 bar / 290 psi), S (15,90 cm² / 2.465 in²), SPM (~ 20 - 100 at 20°C), Velocità massima (1,8 m/s / 70.8 in/s), Kit manutenzione (39BMRV02400D).

Main product table with columns: Codice Code, Cu, L, L min, FO (Forza iniziale), *F1i, **F1p, VO, and PED. It lists various models from RV 2400 - 010 to RV 2400 - 125.

Esempio di ordinazione/Order example = RV 2400-010 (codice/code) • Monouso / Disposable

