

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 4200

OSAS + OSM = OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER



*F1i = Forza finale isoteramica con 100% Cu
Isothermal end force at 100% Cu
**F1p = Forza finale politropica con 100% Cu
Polytrophic end force at 100% Cu

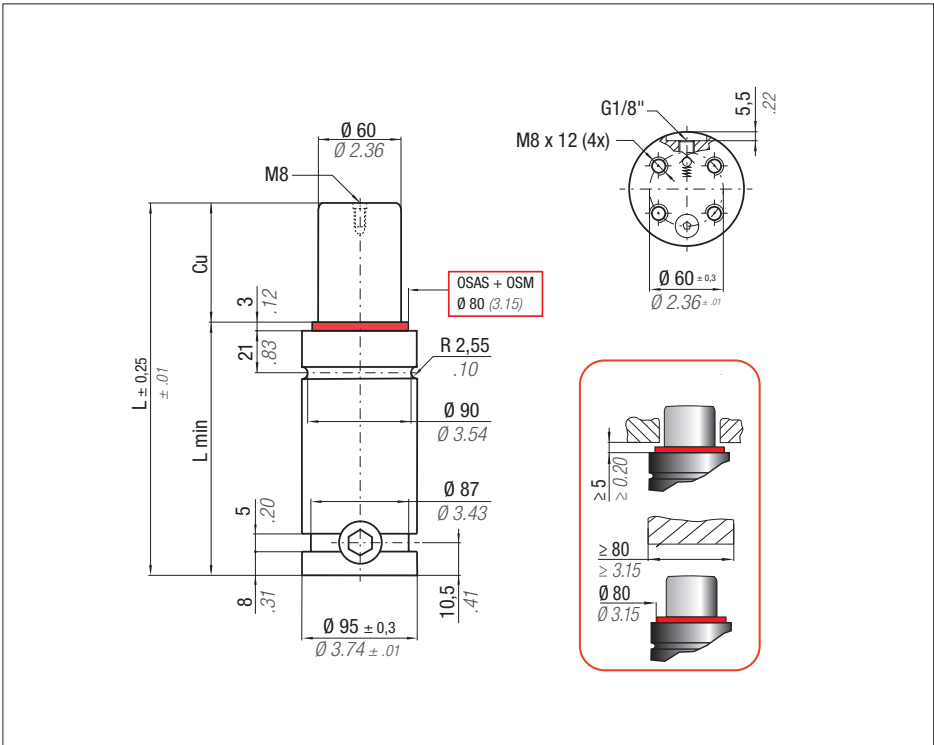


Table with 9 columns: N2, Temperature range (0 - 80 °C), Delta P (± 0,33 %/°C), P max (150 bar), P min (20 bar), S (28,27 cm²), SPM (~ 20 - 100), Velocità massima (1,8 m/s), Kit manutenzione (39BMRV04200C).

Table with 11 columns: Codice Code, Cu, L, L min, FO (Forza iniziale), *F1i (Forza finale), **F1p (Forza finale), VO, ~Kg, ~lb, PED 2014/68/EU. Rows include various RV 4200 models and their specifications.

Esempio di ordinazione/Order example = RV 4200-016 (codice/code) • Monouso / Disposable

