

Cilindri molla ad azoto Serie RV
Nitrogen gas spring RV Series



RV 20000

OSAS + OSM

= OVER STROKE ACTIVE SAFETY = OVER STROKE MARKER

ACTIVE SAFETY



*F1 = Forza finale isotermica con 100% Cu
Isothermal end force at 100% Cu

**F1p = Forza finale politropica con 100% Cu
Polytrophic end force at 100% Cu

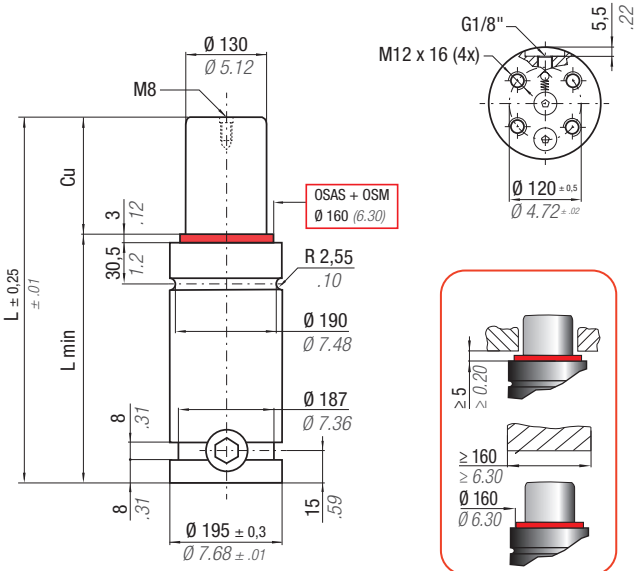


Table with 9 columns: N2, Temperature (0 - 80 °C / 32 - 176 °F), Delta P (± 0,33 %/°C), P max (150 bar / 2175 psi), P min (20 bar / 290 psi), S (132,73 cm² / 20.573 in²), SPM (~ 20 - 80 (at 20°C)), Velocità massima (Max Speed 1,8 m/s / 70.8 in/s), Kit manutenzione (39BMRV20000A Maintenance kit).

Table with 11 columns: Codice Code, Cu, L, L min, FO (Forza iniziale / Initial force), *F1 (Forza finale / End force), **F1p (Forza finale / End force), VO, ~Kg, ~lb, PED (2014/68/EU). Rows list various RV 20000 models and their specifications.

Esempio di ordinazione/Order example = RV 20000-019 (codice/code)

• Monouso / Disposable

Fissaggi Flange mounts

